




## RADIOR K 1003

NBR,

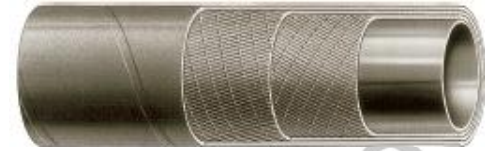

38 : ± 0,79

&gt; 38 : ± 1,59

: ± 1,59

ASTM I/II/III

+100° ( +50°

+120° ),

: ± 1%

-40 °C +100 °C

ІН30831301/40	10	3,5	17	5,0	15,0	0,206	—
ІН30831300/40	12	3,5	19	5,0	15,0	0,236	—
ІН30831302/40	15	3,5	22	5,0	15,0	0,283	—
ІН30831303/40	18	3,5	25	5,0	15,0	0,330	—
ІН30831304/40	20	3,5	27	5,0	15,0	0,361	—
ІН30831305/40	22	3,5	29	5,0	15,0	0,394	—
ІН36831300/40	25	3,5	32	5,0	15,0	0,405	—
ІН36831301/40	28	3,5	35	5,0	15,0	0,452	—
ІН36831302/40	30	3,5	37	5,0	15,0	0,479	—
ІН36831303/40	32	3,5	39	5,0	15,0	0,507	—
ІН36831304/40	35	3,5	42	5,0	15,0	0,549	—
ІН36831305/40	38	3,5	45	5,0	15,0	0,591	—
ІН36831306/20	40	5,5	51	5,0	15,0	1,003	—
ІН36831307/20	42	5,5	53	5,0	15,0	1,045	—
ІН36831308/20	45	5,5	56	5,0	15,0	1,110	—
ІН36831309/20	50	5,5	61	5,0	15,0	1,216	—
ІН36831310/20	55	5,5	66	5,0	15,0	1,323	—
ІН36831311/20	60	5,5	71	5,0	15,0	1,430	—
ІН36831312/20	65	5,5	76	5,0	15,0	1,537	—
ІН36831313/20	70	6	82	5,0	15,0	1,826	—
ІН36831314/20	75	7	89	5,0	15,0	2,256	—
ІН36831315/20	80	7	94	5,0	15,0	2,393	—
ІН36831317/20	90	7	104	5,0	15,0	2,667	—
ІН36831316/20	100	8	116	5,0	15,0	3,386	—

**RUBBER HOSE RADIOR OEL P50 II MADE IN ITALY Parker ITR O/Y**