


## FOOD, CHEMICAL, PHARMACEUTICAL PLUTONE PF

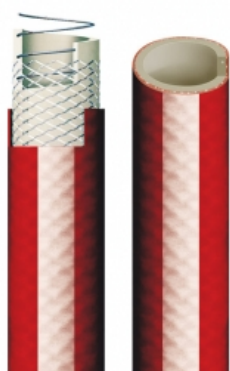

### PLUTONE PF

**Colour:** inside white, outside red with white identification stripe

**Temperature range:** -35°C + 100°C -30°F + 212°F


**Features:** food grade PP/EPDM hose reinforced by steel wire and high tenacity polyester yarn. Very flexible, light and easy to handle. High resistance to weather, ageing. Due to its special compound grants safety in use, maximum hygiene and environment protection (recyclable). Allows vapour sterilization.

**Application:** suction and delivery of alimentary products (no fatty foods) and liqueurs up to a maximum alcoholic content of 50%. Meets EC Directives and Regulations\*.


\* Please contact our offices for more information

### Technical Data

Part Number	Inside Ø	Outside Ø	Weigh	Working Pressure	Bursting Pressure	Vacuum	Bending Radius	Roll Length	Volume
	mm	mm	g/m	bar	bar	mH2O	mm	m	m <sup>3</sup>
PF 01 025.0 035.0	25	35	540	10	30	9,5	100	60	0,135
PF 01 032.0 043.0	32	43	730	10	30	8,5	130	60	0,214
PF 01 038.0 049.0	38	49	850	10	30	8,5	150	30	0,228
PF 01 040.0 051.0	40	51	890	10	30	8,5	160	30	0,223
PF 01 050.0 063.0	50	63	1390	10	30	8	250	30	0,286
PF 01 063.0 077.0	63	77	1820	10	30	8	320	30	0,372
PF 01 076.0 091.0	76	91	2260	10	30	7	380	30	0,603
PF 01 080.0 095.0	80	95	2350	10	30	7	400	20	0,498
PF 01 102.0 118.0	102	118	3280	10	30	7	510	20	0,801

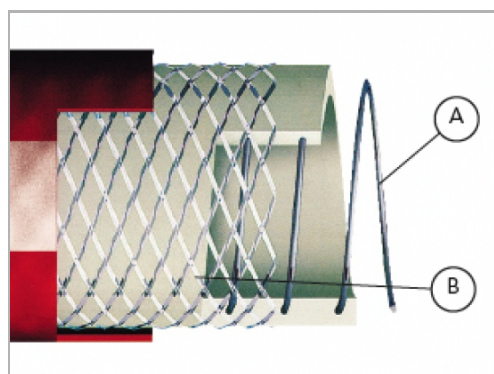

A) Harmonic steel wire  
B) Polyester high tenacity reinforcing yarn

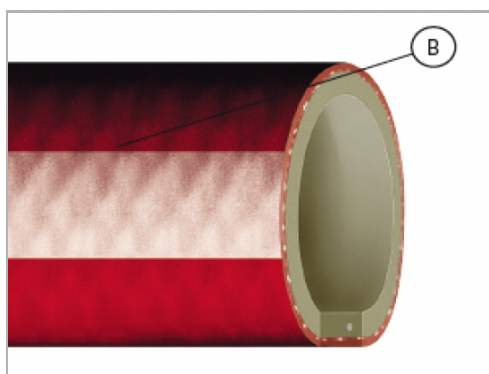

C) PP/EPDM food grade compound

Other sizes are available on request